




Relaciones públicas de precisión.

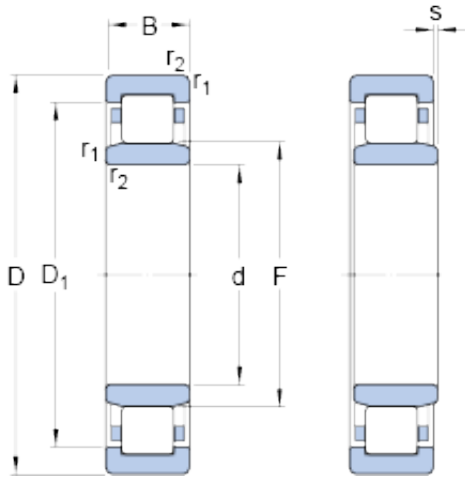

NU 344 M Bearing 2D drawings and 3D CAD models

220 mm x 460 mm x 88 mm SKF NU 344 M Cojinetes De Bola

Bearing No. NU 344 M

| | |
|---|---------------|
| Size | 460x220x88 mm |
| Bore Diameter | 460 mm |
| Outer Diameter | 220 mm |
| Width | 88 mm |
| d | 220 mm |
| D | 460 mm |
| B | 88 mm |
| D ₁ | 371 mm |
| F | 284 mm |
| r _{1,2} - min. | 5 mm |
| s | 5.2 mm |
| d _a - min. | 240 mm |
| d _a - max. | 277 mm |
| d _b - min. | 288 mm |
| D _a - max. | 440 mm |
| r _a - max. | 4 mm |
| Basic dynamic load rating - C | 1210 kN |
| Basic static load rating - C ₀ | 1630 kN |
| Fatigue load limit - P _u | 150 kN |
| Reference speed | 1500 r/min |
| Limiting speed | 1700 r/min |
| Calculation factor - k _r | 0.15 |
| Category | Bearings |
| Inventory | 0.0 |



Relaciones públicas de precisión.

| | |
|--------------------------------|---------|
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0 |
| Product Group | B04144 |
| D_1 | 371 mm |
| $r_{1,2}$ min. | 5 mm |
| s max. | 5.2 mm |
| d_a min. | 240 mm |
| d_a max. | 277 mm |
| d_b min. | 288 mm |
| D_a max. | 440 mm |
| r_a max. | 4 mm |
| Basic dynamic load rating C | 1210 kN |
| Basic static load rating C_0 | 1630 kN |
| Fatigue load limit P_u | 150 kN |
| Calculation factor k_r | 0.15 |
| Limiting value e | 0.2 |
| Axial load factor Y | 0 |
| Mass bearing | 75 kg |