




Relaciones públicas de precisión.

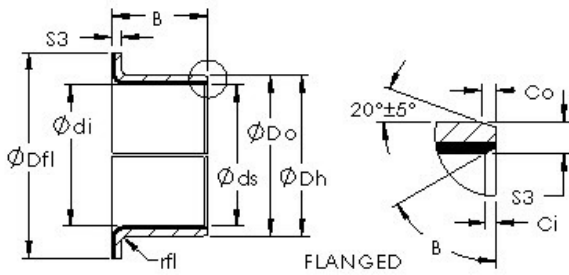

AST AST40 F100120 Rodamientos Deslizantes

Bearing No. AST40 F100120

Bore Diameter	10 mm
Outer Diameter	12 mm
Bearing Type	flanged
Shaft Dia., Nominal (d)	10.0000
Shaft Size (ds) - 10 -0.016 / -0.034	10 0.016 / 0.034
Housing Bore Dia. (Dh)	12 +0.018 / +0
Bearing Outside Diameter, Nominal(Do)	12.000
Bearing Outside Diameter Tolerance (Do tol.)	12.055 / 12.025
Bearing Bore after Mounting (di)	10.058 / 9.99
Average Clearance (Cd)	0.0450
Wall Thickness (S3)	1.005
Bearing Length, Nominal (B)	12.000
Bearing Length Tolerance (B tol.) - +0.25 / -0.25	+0.25 / 0.25
OD Chamfer Length (Co)	0.600
ID Chamfer Angle (B deg.)	30
ID Chamfer Length (Ci)	0.300
Flange Dia. (Dfl pm 0.5)	18.000
Flange Radius (rfl)	1.000
Material	Steel shell with PTFE / Polymer Fiber lining

AST40 F100120 Bearing 2D drawings and 3D CAD models